

T9600 Series

Optical Power Meter

Optical Communications Test Applications

- System power testing
- Attenuation testing
- Fiber identification
- Wavelength Selective Option for PON



Revision 22

The T9600A series shirt-pocket Optical Power Meter is used for testing fiber optic communications systems.

2% traceable calibration accuracy, ease of use and high availability combine to achieve superior measurement confidence.

Detector & calibration options cover a wide range of connector types, fiber types, common wavelengths and power levels from +24 to -60 dBm.

Features

- Shirt pocket size with spring clip
- Patented low cost Interchangeable connector
- Multi-fiber ID for fiber identification
- Large sunlight readable display
- Displays dBm, dB, linear, tone Hz
- Power averaging mode for modulated signal
- Tamper-lock mode for low skill measurement
- Simple to use
- 300-hour battery life
- Max / Min recording & display hold
- Up to 12 calibrated wavelengths
- Compact, rugged & light weight
- ISO 17025 traceable calibration certificate
- 3-year warranty
- 3-year recommended calibration cycle
- Made in Australia

T9600 Series - Optical Power Meter

The small T9600A Pocket Fiber Meter is ideal for measuring absolute / relative light levels or test tones on single mode, multimode or plastic optical fiber (POF) systems. High traceable accuracy and ease of use make it perfect for field or laboratory.

Tough construction includes moisture resistance, rubber corners, a captive connector dust cap and it can be dropped over 2 meters onto a hard surface. This instrument meets MIL PRF 28800F Class 2.

When used with multiple T 9800 sources, the Multi-Fiber ID feature uniquely identifies up to 12 fibers.

The tight total uncertainty specification covers the entire range of measurement, temperature, connectors and fiber types, without warm up or dark current offset. Calibration is ISO 17025 traceable.

Operational savings come from a 3-year warranty, 300 hours of battery life, and fast operation.

The meter displays mW, μ W, nW, dB, dBm to 0.01 dB resolution. A separate reference for each λ can be stored.

A Power Averaging Mode measures the average power of modulated signals.

The Tamper-lock mode enables a site manager to lock and track instrument settings to reduce measurement sTII and improve both test confidence and traceability.

Interchangeable optical connectors are dust and drop protected. Other styles include the popular LC.

The InGaAs meter is the preferred solution for single mode testing from 900 – 1650 nm.

Ge meters offer modest accuracy from 660 to 1550 nm.

H series meters are available for high power testing. They offer good immunity to wavelength and reflection effects.

For testing 1 mm POF, ribbon fiber, MT-RJ, expanded beam connectors etc., refer to the alternative T9600-XL brochure for instruments with large area detectors.

TECHNICAL SPECIFICATIONS

| Response λ nm | Damage level dBm | Calibration λ nm | Power range dBm | Tone & multi-fiber ID sensitivity dBm | Midrange linearity ¹ dB | Calibration Accuracy ² % | Polarization Sensitivity ⁶ dB | Total Uncertainty ^{3,5} dB | λ Sensitivity ⁵ ± 30 nm dB | |
|------------------------------|---------------------|---|--------------------|--|---------------------------------------|--|---|--|---|---------|
| InGaAs detector | | | | | | | | | | |
| 600 ~ 1700 | +15 | 850 1300, 1310, 1390, 1490, 1550, 1610, 1625 | +5 ~ -60 | -40 -50 | 0.04 | 2 % (0.09 dB) | < 0.05 | 0.3 | 0.03 | |
| H3B (InGaAs) detector | | | | | | | | | | |
| 800 ~ 1700 | +27 ⁴ | 850 1300, 1310, 1390, 1490, 1550, 1590, 1610, 1625 | +24 ~ -40 | -20 -30 | 0.04 | 2 % (0.09dB) | < 0.05 | 0.3 | 0.03 | |
| H5 (InGaAs) detector | | | | | | | | | | |
| 800 ~ 1700 | +25 ⁴ | 850 1300, 1310, 1390, 1490, 1550, 1590, 1610, 1625 | +15 ~ -50 | -30 -40 | 0.04 | 2 % (0.09dB) | < 0.05 | 0.3 | 0.03 | |
| Ge detector | | | | | | | | | | |
| 600 ~ 1650 | +20 | 635, 650, 660, 780, 1610, 1625 850, 1300, 1310, 1390, 1490, 1550 | +70 ~ -60 | -40 -50 | 0.06 | 2 % (0.09dB) | < 0.05 | 0.5 | 0.04 | |
| typical | | | | | | | typical | | max | typical |

Note 1: Mid-range linearity @ 1550 nm for InGaAs & Ge, or 850 nm for Si. Non-coherent light, with APC connector. Excludes top 5 dB and bottom 10 dB of range.

Note 2: Calibration condition: non-coherent light, -35 \pm 5 dBm, 23 \pm 3°C, \pm 1 nm, 10 \pm 3 nm FWHM, PC ceramic connector, 100 μ m fiber.

Note 3: Includes contributions of: varying optical connector types, calibration uncertainty, linearity over temperature & range, and fiber core diameter up to 200 μ m.

Note 4: H5 & 3B can sustain the damage level for 2 minutes.

Note 5: At calibration wavelengths in bold type.

Note 6: For APC connectors only.

Australian and international patents. Technical data is subject to change without notice as part of our program of continuous improvements.

GENERAL SPECIFICATIONS

| Parameters | Value |
|-------------------------------|--|
| Battery life | 300 hours |
| Size | 124 x 81 x 25 mm, 4.9 x 3.2 x 1.0" |
| Weight | 0.15 kg, 0.33 lb. Shipping 0.5 kg, 1.1 lb. |
| Operating / Storage | -15 to 55 °C / -25 to 70 °C |
| Relative humidity | 0 ~ 95% |
| Case | Polycarbonate with captive dust cap, 2.5-meter drop tested |
| Tone detection | 200 ~ 2500 Hz ± 2 % |
| Recommended calibration cycle | 3 years |
| Max / min | Recording feature for stability testing |
| Power | 2 alkaline AAA cells. Selectable auto-off, low battery indicator |

ORDERING INFORMATION

| Description | Part number |
|--------------------------------|---------------|
| Instrument, Power Meter InGaAs | T9600A-InGaAs |
| Instrument, Power Meter H3B | T9600A-H3B |
| Instrument, Power Meter H5 | T9600A-H5 |
| Instrument, Power Meter Ge | T9600A-Ge |

STANDARD ACCESSORIES


| Description | Quantity |
|--|----------|
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/SC (OPT046) | 1 |
| Carry pouch (OPT156*) | 1 |
| Wrist strap | 1 |
| ILAC/ NATA traceable certificate | 1 |
| QA certificate | 1 |
| Quick guide | 1 |

This instrument is supplied with metal-free sleeve optical interchangeable connector adaptors. The power meter works with both PC and APC connectors. Green is associated with APC.

OPTIONAL INTERCHANGEABLE CONNECTOR ADAPTORS

| Description | Part number |
|--|-------------|
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/FC | OPT051 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/LC, metal body | OPT076 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/ST | OPT040 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/D4 | OPT055 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/MU | OPT080 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/LSA-DIN47256 | OPT071 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/E2000 | OPT060 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/E2000 Green | OPT060G |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/Universal 1.25 mm | OPT084 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/Universal 2.5 mm | OPT081 |
| Option, Hybrid Adaptor, Metal Sleeve, SC/SMA 905/906 | OPT082 |
| Option, Hybrid Adaptor, Ceramic Sleeve, SC/F3000 or LC Simplex, plastic body | OPT072 |

The power meter works with both PC and APC connectors.

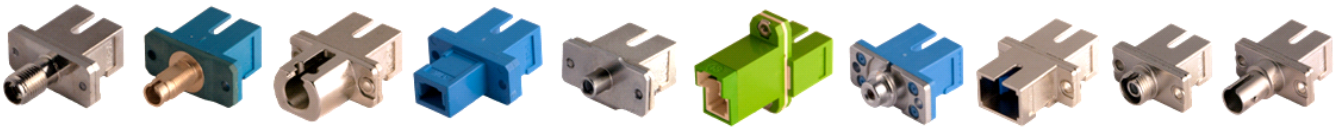

History Record

| Revision | Date | Editor | Change Description |
|----------|-----------|--------|--------------------|
| 22 | 27Jul2021 | TO Ng | |

AUTHORIZED DEALER



TEMPO COMMUNICATIONS

1390 Aspen Way Vista, CA • 92081 | PHONE: (800)642-2155

Latin America Phone: 1.760.510.0558 | EMEA Phone: +44 (0) 1633 927 050

EMEA Address: Tempo Europe Limited • Brecon House,

William Brown Close, Cwmbran • NP44 3AB, UK

©2023 Tempo Communications, Inc. • An ISO 9001 Company

